SIEMENS

Data sheet

3RV2711-4AD10



Circuit breaker size S00 for system protection with approval circuit breaker UL 489, CSA C22.2 No.5-02 A-release 15 A N-release 208 A screw terminal Standard switching capacity

product brand name	SIRIUS		
product designation	Circuit breaker		
design of the product	For system protection according to UL 489/CSA C22.2 No. 5		
product type designation	3RV2		
General technical data			
size of the circuit-breaker	S00		
product extension auxiliary switch	Yes		
power loss [W] for rated value of the current			
 at AC in hot operating state 	9.25 W		
 at AC in hot operating state per pole 	3.1 W		
insulation voltage with degree of pollution 3 at AC rated value	690 V		
surge voltage resistance rated value	6 kV		
maximum permissible voltage for safe isolation in networks with grounded star point			
 between main and auxiliary circuit 	400 V		
 between main and auxiliary circuit 	400 V		
shock resistance acc. to IEC 60068-2-27	25g / 11 ms		
mechanical service life (switching cycles)			
 of the main contacts typical 	100 000		
of auxiliary contacts typical	100 000		
electrical endurance (switching cycles) typical	100 000		
reference code acc. to IEC 81346-2	Q		
Substance Prohibitance (Date)	01.10.2009		
Ambient conditions			
installation altitude at height above sea level maximum	2 000 m		
ambient temperature			
 during operation 	-20 +60 °C		
 during storage 	-50 +80 °C		
during transport	-50 +80 °C		
temperature compensation	-20 +60 °C		
relative humidity during operation	10 95 %		
Main circuit			
number of poles for main current circuit	3		
operating voltage			
 rated value 	690 V		
 rated value 	20 690 V		
 at AC-3 rated value maximum 	690 V		
operating frequency rated value	50 60 Hz		
operational current rated value	15 A		

aparational aurrant at AC 2 at 400 V rated value	15 A
operational current at AC-3 at 400 V rated value	15 A
operating power at AC-3	4 100
at 230 V rated value	4 kW
at 400 V rated value	7.5 kW
at 500 V rated value	7.5 kW
at 690 V rated value	11 kW
operating frequency at AC-3 maximum	15 1/h
Auxiliary circuit	
number of NC contacts for auxiliary contacts	0
number of NO contacts for auxiliary contacts	0
number of CO contacts for auxiliary contacts	0
Protective and monitoring functions	
product function	
 ground fault detection 	No
phase failure detection	No
design of the overload release	thermal
breaking capacity operating short-circuit current (Ics) at AC	
• at 240 V rated value	100 kA
• at 400 V rated value	30 kA
• at 500 V rated value	5 kA
• at 690 V rated value	2 kA
breaking capacity maximum short-circuit current (Icu)	
 at AC at 240 V rated value 	100 kA
 at AC at 400 V rated value 	55 kA
 at AC at 500 V rated value 	10 kA
 at AC at 690 V rated value 	4 kA
 at 480 AC Y/277 V acc. to UL 489 rated value 	65 kA
response value current of instantaneous short-circuit trip unit	208 A
Short-circuit protection	
Short-circuit protection product function short circuit protection	Yes
	Yes magnetic
product function short circuit protection	
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit	
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit	gG 80 A gG 63 A
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit ● at 240 V	gG 80 A
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 240 V • at 400 V	gG 80 A gG 63 A
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 240 V • at 400 V • at 500 V	magnetic gG 80 A gG 63 A gG 50 A
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 240 V • at 400 V • at 500 V • at 690 V	magnetic gG 80 A gG 63 A gG 50 A
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 240 V • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions	magnetic gG 80 A gG 63 A gG 50 A gG 40 A any screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 240 V • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height	magnetic gG 80 A gG 63 A gG 50 A gG 40 A any screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 144 mm
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 240 V • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width	magnetic gG 80 A gG 63 A gG 50 A gG 40 A any screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 144 mm 45 mm
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 240 V • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth	magnetic gG 80 A gG 63 A gG 50 A gG 40 A any screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 144 mm
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 240 V • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing	magnetic gG 80 A gG 63 A gG 50 A gG 40 A any screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 144 mm 45 mm
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 240 V • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V	magnetic gG 80 A gG 63 A gG 50 A gG 40 A any screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 144 mm 45 mm 97 mm
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 240 V • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards	magnetic gG 80 A gG 63 A gG 50 A gG 40 A any screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 144 mm 45 mm 97 mm 30 mm
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 240 V • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards	magnetic gG 80 A gG 63 A gG 50 A gG 40 A any screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 144 mm 45 mm 97 mm
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 240 V • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side	magnetic gG 80 A gG 63 A gG 50 A gG 40 A any screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 144 mm 45 mm 97 mm 30 mm
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 240 V • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — at the side — at the side • for live parts at 400 V	magnetic gG 80 A gG 63 A gG 50 A gG 40 A any screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 144 mm 45 mm 97 mm 30 mm 30 mm
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 240 V • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side	magnetic gG 80 A gG 63 A gG 50 A gG 40 A any screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 144 mm 45 mm 97 mm 30 mm 30 mm
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 240 V • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — at the side — at the side • for live parts at 400 V	magnetic gG 80 A gG 63 A gG 50 A gG 40 A any screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 144 mm 45 mm 97 mm 30 mm 30 mm 30 mm
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 240 V • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — at the side • for live parts at 400 V — downwards — upwards — at the side • for live parts at 400 V	magnetic gG 80 A gG 63 A gG 50 A gG 40 A any screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 144 mm 45 mm 97 mm 30 mm 30 mm 30 mm
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 240 V • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — at the side • for live parts at 400 V — downwards — upwards	magnetic gG 80 A gG 63 A gG 50 A gG 40 A any screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 144 mm 45 mm 97 mm 30 mm 30 mm 30 mm 30 mm 30 mm
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 240 V • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — at the side • for live parts at 400 V — at the side • for live parts at 400 V — at the side • for live parts at 400 V — at the side	magnetic gG 80 A gG 63 A gG 50 A gG 40 A any screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 144 mm 45 mm 97 mm 30 mm 30 mm 30 mm 30 mm 30 mm
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 240 V • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — at the side • for live parts at 400 V — at the side • for live parts at 400 V — at the side • for live parts at 400 V — at the side • for live parts at 400 V	magnetic gG 80 A gG 63 A gG 50 A gG 40 A any screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 144 mm 45 mm 97 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 240 V • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards	magnetic gG 80 A gG 63 A gG 50 A gG 40 A any screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 144 mm 45 mm 97 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 240 V • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards — upwards — upwards	magnetic gG 80 A gG 63 A gG 50 A gG 40 A any screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 144 mm 45 mm 97 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm

— downwards	30 mm		
— upwards	30 mm		
— at the side	30 mm		
 for grounded parts at 690 V 			
— downwards	70 mm		
— upwards	70 mm		
— backwards	0 mm		
— at the side	30 mm		
— forwards	0 mm		
 for live parts at 690 V 			
— downwards	70 mm		
— upwards	70 mm		
— backwards	0 mm		
— at the side	30 mm		
— forwards	0 mm		
Connections/ Terminals			
product component removable terminal for auxiliary	No		
and control circuit			
type of electrical connection			
for main current circuit	screw-type terminals		
arrangement of electrical connectors for main curre			
circuit			
type of connectable conductor cross-sections			
for main contacts			
— solid or stranded	1 10 mm², max. 2x 10 mm²		
 finely stranded with core end processing 	$1 \dots 16 \text{ mm}^2$, max. $6 + 16 \text{ mm}^2$		
at AWG cables for main contacts	2x (14 10)		
tightening torque			
 for main contacts with screw-type terminals 	2.5 3 N·m		
design of screwdriver shaft	Diameter 5 to 6 mm		
size of the screwdriver tip	Pozidriv 2		
design of the thread of the connection screw			
for main contacts	M4		
Safety related data	דועו		
B10 value	5 000		
with high demand rate acc. to SN 31920	5 000		
proportion of dangerous failures			
• with low demand rate acc. to SN 31920	50 %		
with high demand rate acc. to SN 31920	50 %		
failure rate [FIT]			
with low demand rate acc. to SN 31920	50 FIT		
T1 value for proof test interval or service life acc. to IEC 61508	10 у		
protection class IP on the front acc. to IEC 60529	IP20		
touch protection on the front acc. to IEC 60529	finger-safe, for vertical contact from the front		
display version for switching status	Handle		
Certificates/ approvals			
General Product Approval			
Declaration of Conformity Test Cer	tificates Marine / Shipping		

<u>UK Declaration of</u> <u>Conformity</u>	CE EG-Konf.	Type Test Certific- ates/Test Report	Special Test Certific- ate	BUREAU VERITAS	Llovd's Register us
Marine / Shipping	other		Railway		
RMRS	<u>Confirmation</u>	DE	Vibration and Shock		

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV2711-4AD10

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV2711-4AD10

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RV2711-4AD10

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RV2711-4AD10&lang=en


Characteristic: Tripping characteristics, I2t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RV2711-4AD10/char

Further characteristics (e.g. electrical endurance, switching frequency)

http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RV2711-4AD10&objecttype=14&gridview=view1

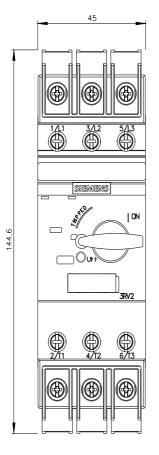

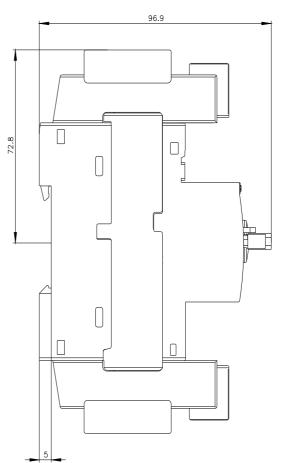

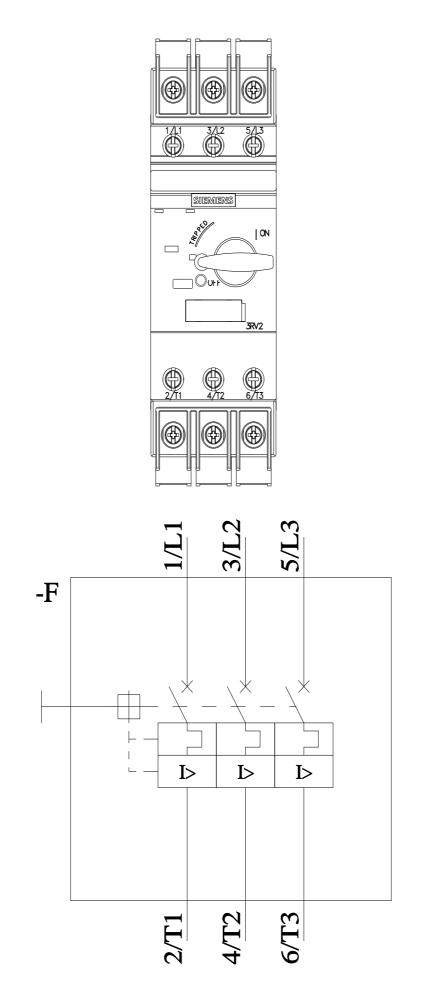

11/17/2021 🖸