

Semiconductor relay, 1-phase 3RF2 Width 22.5 mm, 20 A 24-230 V / 4-30 V DC screw terminal

product brand name	SIRIUS
product designation	solid-state relay
design of the product	single-phase
product type designation	3RF21
manufacturer's article number	
<ul style="list-style-type: none"> • _1 of the accessories that can be ordered • _2 of the accessories that can be ordered • _3 of the accessories that can be ordered • _4 of the accessories that can be ordered • _5 of the accessories that can be ordered 	3RF2900-3PA88 3RF2920-0HA13 3RF2900-0EA18 3RF2920-0GA13 3RF2920-0FA08
product designation	
<ul style="list-style-type: none"> • _1 of the accessories that can be ordered • _2 of the accessories that can be ordered • _3 of the accessories that can be ordered • _4 of the accessories that can be ordered • _5 of the accessories that can be ordered 	terminal cover power regulator converter load monitoring load monitoring, basis
General technical data	
product function	zero-point switching
power loss [V·A] maximum	28.6 V·A
power loss [W] for rated value of the current at AC in hot operating state	28.6 W
<ul style="list-style-type: none"> • per pole 	28.6 W
power loss [W] for rated value of the current without load current share typical	0.5 W
insulation voltage rated value	600 V
type of voltage of the control supply voltage	DC
surge voltage resistance of main circuit rated value	6 kV
shock resistance acc. to IEC 60068-2-27	15g / 11 ms
vibration resistance acc. to IEC 60068-2-6	2g
reference code acc. to IEC 81346-2	Q
Substance Prohibitance (Date)	28.05.2009
Main circuit	
number of poles for main current circuit	1
number of NO contacts for main contacts	1
number of NC contacts for main contacts	0
operating voltage at AC	
<ul style="list-style-type: none"> • at 50 Hz rated value • at 60 Hz rated value 	24 ... 230 V 24 ... 230 V
operating frequency rated value	50 ... 60 Hz
relative symmetrical tolerance of the operating	10 %

frequency	
operating range relative to the operating voltage at AC	
• at 50 Hz	20 ... 253 V
• at 60 Hz	20 ... 253 V
operational current	
• at AC-51 rated value	20 A
• acc. to UL 508 rated value	20 A
ampacity maximum	20 A
operational current minimum	100 mA
rate of voltage rise at the thyristor for main contacts maximum permissible	500 V/μs
blocking voltage at the thyristor for main contacts maximum permissible	800 V
reverse current of the thyristor	10 mA
derating temperature	40 °C
surge current resistance rated value	200 A
I²t value maximum	200 A ² ·s
Control circuit/ Control	
type of voltage of the control supply voltage	DC
control supply voltage 1	
• at DC rated value	30 V
• at DC	4 ... 30 V
control supply voltage	
• at DC initial value for signal <1> detection	4 V
• at DC full-scale value for signal<0> recognition	1 V
control current at minimum control supply voltage	
• at DC	13 mA
control current at DC rated value	15 mA
ON-delay time	1 ms; additionally max. one half-wave
OFF-delay time	1 ms; additionally max. one half-wave
Auxiliary circuit	
number of NC contacts for auxiliary contacts	0
number of NO contacts for auxiliary contacts	0
number of CO contacts for auxiliary contacts	0
Installation/ mounting/ dimensions	
fastening method	screw fixing
• side-by-side mounting	Yes
tightening torque of fixing screw maximum	1.5 N·m
tightening torque [lbf·in] of fixing screw maximum	13 lbf·in
height	85 mm
width	22.5 mm
depth	48 mm
Connections/ Terminals	
type of electrical connection	
• for main current circuit	screw-type terminals
• for auxiliary and control circuit	screw-type terminals
type of connectable conductor cross-sections	
• for main contacts	
— solid	2x (1.5 ... 2.5 mm ²), 2x (2.5 ... 6 mm ²)
— finely stranded with core end processing	2x (1 ... 2.5 mm ²), 2x (2.5 ... 6 mm ²), 1x 10 mm ²
• at AWG cables for main contacts	2x (14 ... 10)
connectable conductor cross-section for main contacts	
• solid or stranded	1.5 ... 6 mm ²
• finely stranded with core end processing	1 ... 10 mm ²
type of connectable conductor cross-sections	
• for auxiliary and control contacts	
— solid	1x (0.5 ... 2.5 mm ²), 2x (0.5 ... 1.0 mm ²)
— finely stranded with core end processing	1x (0.5 ... 2.5 mm ²), 2x (0.5 ... 1.0 mm ²)
— finely stranded without core end processing	1x (0.5 ... 2.5 mm ²), 2x (0.5 ... 1.0 mm ²)

<ul style="list-style-type: none">• at AWG cables for auxiliary and control contacts	1x (AWG 20 ... 12)			
AWG number as coded connectable conductor cross section for main contacts	14 ... 10			
tightening torque <ul style="list-style-type: none">• for main contacts with screw-type terminals• for auxiliary and control contacts with screw-type terminals	2 ... 2.5 N·m 0.5 ... 0.6 N·m			
tightening torque [lbf·in] <ul style="list-style-type: none">• for main contacts with screw-type terminals• for auxiliary and control contacts with screw-type terminals	7 ... 10.3 lbf·in 4.5 ... 5.3 lbf·in			
design of the thread of the connection screw <ul style="list-style-type: none">• for main contacts• of the auxiliary and control contacts	M4 M3			
stripped length of the cable <ul style="list-style-type: none">• for main contacts• for auxiliary and control contacts	7 mm 7 mm			
Safety related data				
protection class IP on the front acc. to IEC 60529	IP20			
touch protection on the front acc. to IEC 60529	finger-safe, for vertical contact from the front			
Ambient conditions				
installation altitude at height above sea level maximum	1 000 m			
ambient temperature <ul style="list-style-type: none">• during operation• during storage	-25 ... +60 °C -55 ... +80 °C			
Electromagnetic compatibility				
conducted interference <ul style="list-style-type: none">• due to burst acc. to IEC 61000-4-4• due to conductor-earth surge acc. to IEC 61000-4-5• due to conductor-conductor surge acc. to IEC 61000-4-5• due to high-frequency radiation acc. to IEC 61000-4-6	2 kV / 5 kHz behavior criterion 2 2 kV behavior criterion 2 1 kV behavior criterion 2 140 dBuV in the frequency range 0.15 ... 80 MHz, behavior criterion 1			
field-based interference acc. to IEC 61000-4-3	80 MHz ... 1 GHz 10 V/m, behavior criterion 1			
electrostatic discharge acc. to IEC 61000-4-2	4 kV contact discharging / 8 kV air discharging, behavior criterion 2			
conducted HF interference emissions acc. to CISPR11	Class A for industrial environment			
field-bound HF interference emission acc. to CISPR11	Class B for the domestic, business and commercial environments			
Short-circuit protection, design of the fuse link				
manufacturer's article number <ul style="list-style-type: none">• of gS fuse for semiconductor protection at NH design usable• of full range R fuse link for semiconductor protection at cylindrical design usable• of back-up R fuse link for semiconductor protection at NH design usable• of back-up R fuse link for semiconductor protection at cylindrical design 10 x 38 mm usable• of back-up R fuse link for semiconductor protection at cylindrical design 14 x 51 mm usable• of back-up R fuse link for semiconductor protection at cylindrical design 22 x 58 mm usable	3NE1814-0 5SE1325 3NE8015-1 3NC1032 3NC1430 3NC2225			
manufacturer's article number of the gG fuse <ul style="list-style-type: none">• at NH design usable• at cylindrical design 10 x 38 mm usable• at cylindrical design 14 x 51 mm usable	3NA6803: These fuses have a smaller rated current than the semiconductor relays 3NW6001-1: These fuses have a smaller rated current than the semiconductor relays 3NW6101-1: These fuses have a smaller rated current than the semiconductor relays			
manufacturer's article number <ul style="list-style-type: none">• of NEOZED fuse usable	5SE2306: These fuses have a smaller rated current than the semiconductor relays			
Certificates/ approvals				
General Product Approval		EMC	Declaration of	Test Certificates



[Special Test Certificate](#)

Test Certificates

other

Railway

[Type Test Certificates/Test Report](#)

[Confirmation](#)



[Vibration and Shock](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RF2120-1AA42>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RF2120-1AA42>



Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RF2120-1AA42>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RF2120-1AA42&lang=en

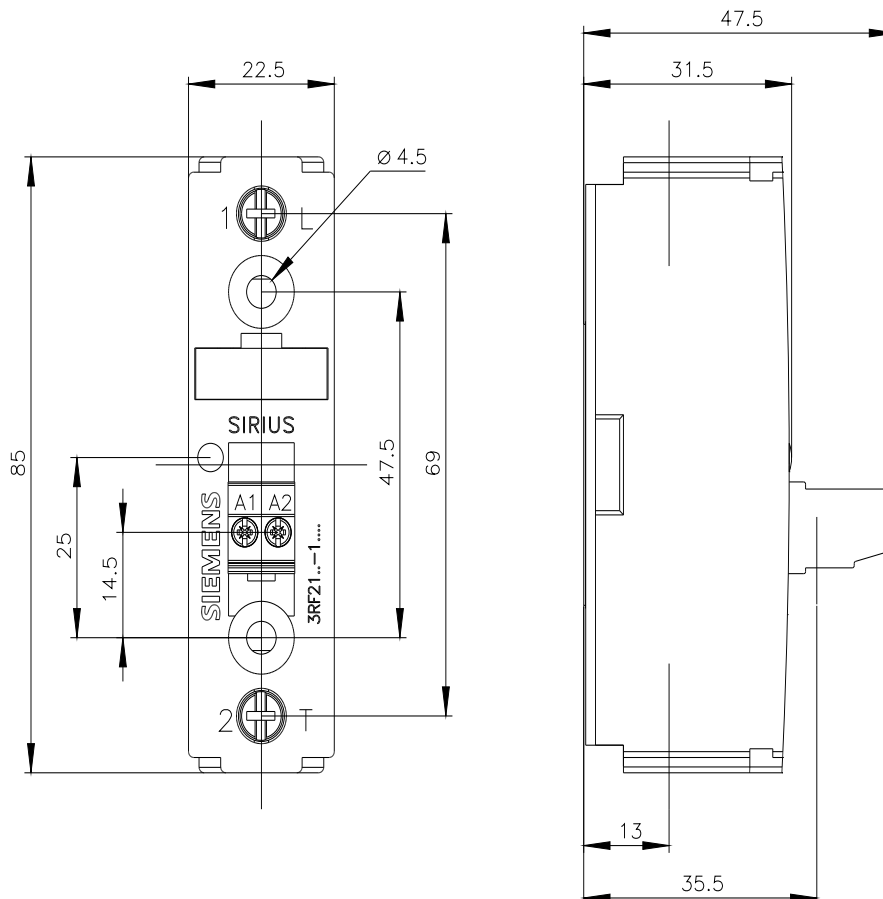

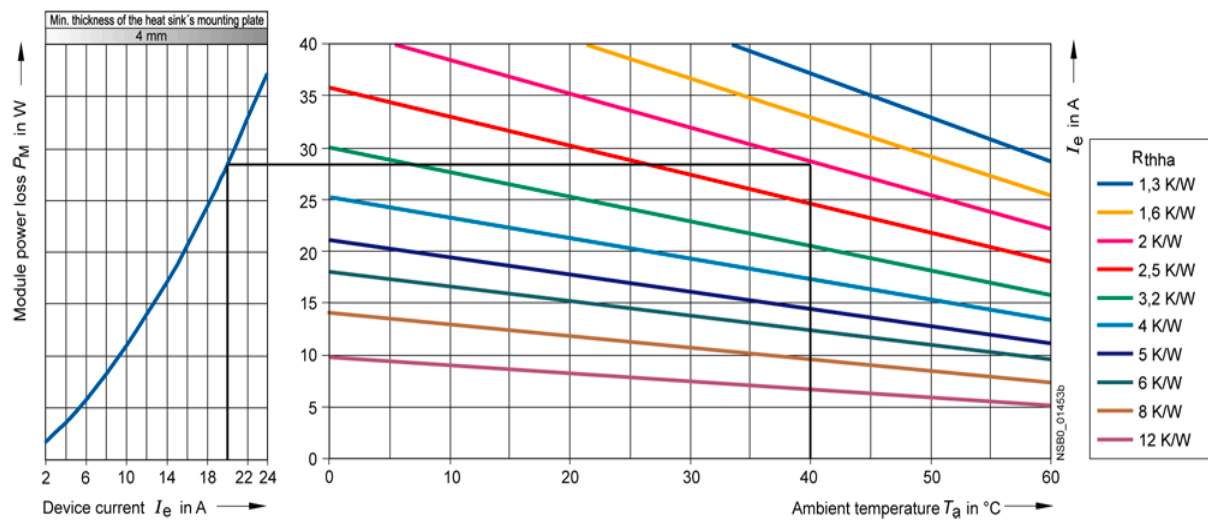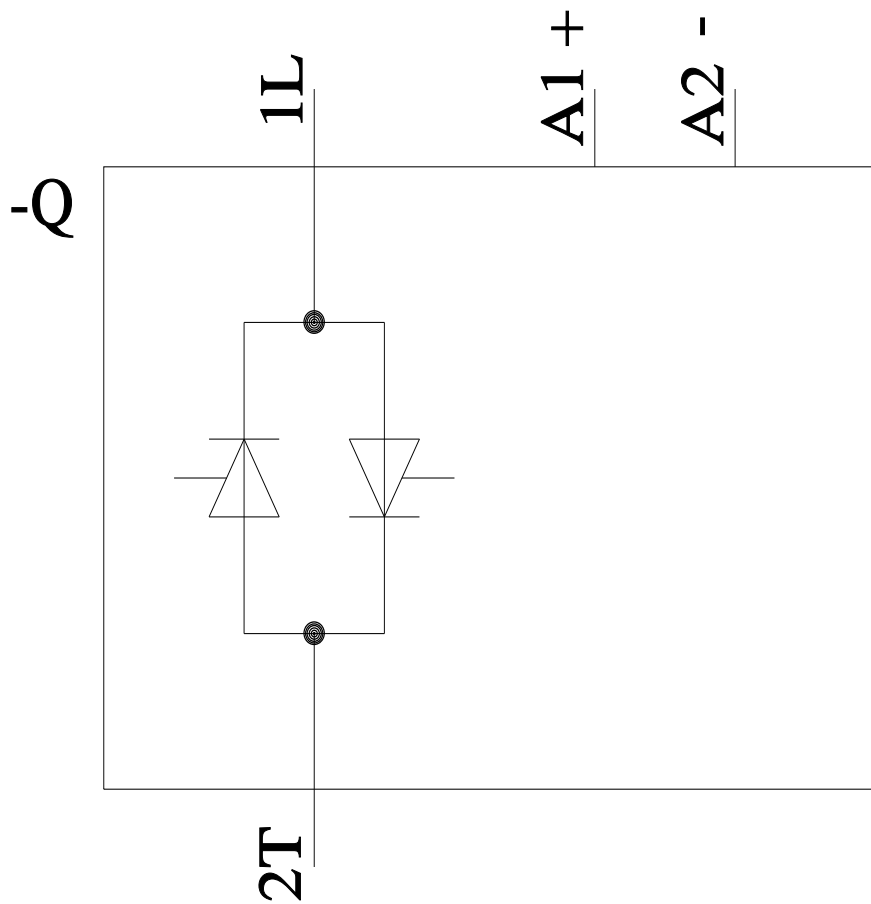

last modified:

1/12/2022