



HOKE

405 Centura Court, PO Box 4866


Spartanburg, SC 29303

Phone: 864.574.7966 • Fax: 864.587.5608

E-Mail: sales@hoke.com • Web site:www.hoke.com

Item # CVH G 6 Y 1 1 S, Gyrolok Tube Fitting, Fractional

QUOTE

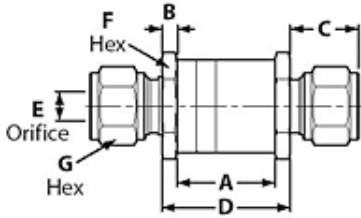

SPECIFICATIONS

Fitting Size	3/8"/6mm
Body Material	316 Stainless Steel
Crack Pressure	0.5 psig (0.04 bar)
Seal Material	Viton
Cv Factor	1.71
Temperature	-20° to +400° °F -29° to +204° °C
A	1.26 in
B	0.20 in
C	0.83 in
D	1.66 in
E	0.30 in
F	1.44 in
G	0.83 in

Features & Specifications

- Rapid response
- Resilient o-ring seat provides cushioned, noise-free closing and zero leakage
- Floating o-ring design: o-ring is continually cleaned so contaminants do not prevent sealing
- Various materials of construction can be used with any liquid or gas service
- Various end connections can be assembled in any system or application
 - Spring-loaded poppet can be mounted in any orientation
 - Full flow with minimal restriction for maximum Cv rates
 - Virtually maintenance free for maximum dependability
 - Pressures up to 6000 psig (414 bar)
- Cracking pressure range is 0.5 to 20 psig (0 to 1 bar) $\pm 10\%$
 - Flow up to 7.4 Cv maximum
 - Greater than 100,000 life cycles
- Special High Tolerance NPT Thread