

Pin busbar, 16 mm<sup>2</sup> connection: 3x 2-phase according to UL 489, 480Y/277V for LS 5SJ4...-HG

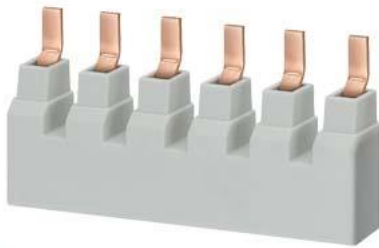


Figure similar

Model		
product brand name	SENTRON	
product designation	Pin busbar	
design of the product	16 mm <sup>2</sup> , 3x2PH, UL489	
General technical data		
phase number	2	
cross-section	16 mm <sup>2</sup>	
Product details		
product feature / insulated	Yes	
Connections		
type of electrical connection	Pin	
Mechanical Design		
width	15 mm	
length	100 mm	
net weight	62.45 g	
<b>General Product Approval</b>	<b>Declaration of Conformity</b>	<b>other</b>



[Miscellaneous](#)



[Miscellaneous](#)

### Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5ST3664-0HG>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/5ST3664-0HG>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=5ST3664-0HG](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5ST3664-0HG)

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

