



WIRE CONNECTOR; 3 PCS. ACCESSORY FOR: 3VA5/6 400/600



Model	
product brand name	SETRON
product designation	accessories
Accessories	Wire connector
General technical data	
designation / of the terminal	TA1.5
Connections according IEC	
connectable conductor cross-section	
<ul style="list-style-type: none"> for copper cable / stranded / minimum for copper cable / stranded / maximum for aluminum cable / stranded / minimum for aluminum cable / stranded / maximum 	50 mm ² 300 mm ² 50 mm ² 300 mm ²
stripped length	28 mm
Connections according UL	
permissible temperature / of connectable conductor / according to UL 486A-486B	75 °C
stripped length	1.1 in
connectable conductor cross-section	
<ul style="list-style-type: none"> for copper cable / stranded / minimum for copper cable / stranded / maximum for copper cable / finely stranded / minimum for copper cable / finely stranded / maximum for aluminum cable / stranded / minimum for aluminum cable / stranded / maximum 	1 AWG 600 kcmil 1 AWG 600 kcmil 1 AWG 600 kcmil
tightening torque / when using copper cables	
<ul style="list-style-type: none"> stranded finely stranded 	1 AWG - 600 kcmil: 375 lb-in 1 AWG - 600 kcmil: 375 lb-in
Further information	
Information- and Downloadcenter (Catalogs, Brochures,...) http://www.siemens.com/lowvoltage/catalogs	
Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA9373-0JB13	
Service&Support (Manuals, Certificates, Characteristics, FAQs,...) https://support.industry.siemens.com/cs/ww/en/ps/3VA9373-0JB13	
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...) http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9373-0JB13	
CAx-Online-Generator http://www.siemens.com/cax	
Tender specifications http://www.siemens.com/specifications	

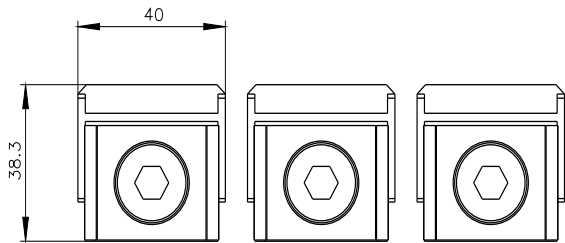

last modified:

12/20/2020 

