



Buzzer element, black, continuous tone or pulsating, adjustable, 85 dB, 24 V AC/DC, diameter 50 mm

General technical data			
product brand name		SIRIUS	
product designation		Buzzer element	
type of voltage of the operating voltage		AC/DC	
operating voltage			
• 1 at DC rated value		24 V	
• 1 at AC at 50 Hz rated value		24 V	
• 1 at AC at 60 Hz rated value		24 V	
relative positive tolerance of the operating voltage		10 %	
relative negative tolerance of the operating voltage		-10 %	
consumed current maximum		30 mA	
type of acoustic signal		continuous tone / pulse tone	
loudness level		85 dB	
service life of acoustic signal device		5 000 h	
tone frequency			
• 1		2.5 kHz	
material		PC	
color		black	
fastening method		Bayonet	
reference code			
• acc. to DIN EN 61346-2		P	
• acc. to IEC 81346-2		P	
Mechanical data			
outer diameter of the signal column element		50 mm	
Ambient conditions			
ambient temperature during operation		-20 ... +50 °C	
protection class IP		IP54	
product function adjustable acoustic signal		Yes	
height		72 mm	
width		52 mm	
Certificates/ approvals			
General Product Approval		EMC	Declaration of Conformity
			other



[UK Declaration of Conformity](#)

[Confirmation](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=8WD4220-0FA>

Cax online generator



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=8WD4220-0FA>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<https://support.industry.siemens.com/cs/ww/en/ps/8WD4220-0FA>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=8WD4220-0FA&lang=en

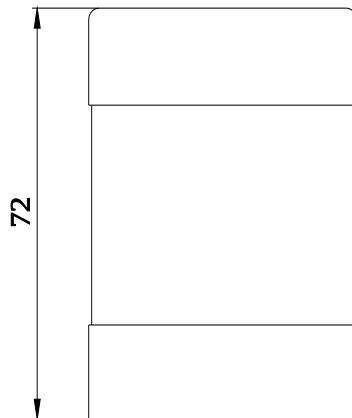

-P

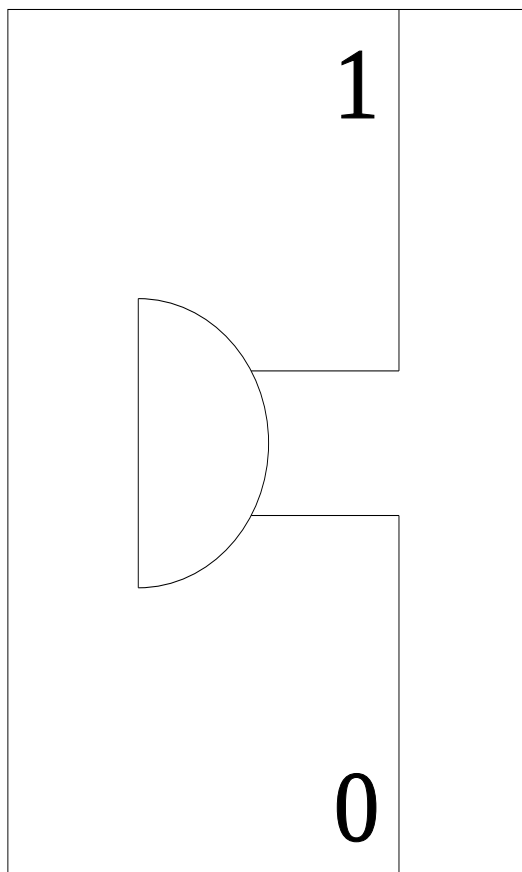

last modified:

12/23/2020 [↗](#)