



Circuit breaker size S0 for motor protection, CLASS 10 A-release 1.1...1.6 A N-release 21 A screw terminal Standard switching capacity

|   |                      |
|---|----------------------|
| product brand name  | SIRIUS               |
| product designation   | Circuit breaker      |
| design of the product   | For motor protection |
| product type designation  | 3RV2                 |
| <b>General technical data</b>   |                      |
| size of the circuit-breaker   | S0                   |
| size of contactor can be combined company-specific                                  | S00, S0              |
| product extension auxiliary switch  | Yes                  |
| power loss [W] for rated value of the current                                       |                      |
| • at AC in hot operating state  | 7.25 W               |
| • at AC in hot operating state per pole   | 2.4 W                |
| insulation voltage with degree of pollution 3 at AC rated value                     | 690 V                |
| surge voltage resistance rated value  | 6 kV                 |
| maximum permissible voltage for safe isolation in networks with grounded star point |                      |
| • between main and auxiliary circuit  | 400 V                |
| • between main and auxiliary circuit  | 400 V                |
| shock resistance acc. to IEC 60068-2-27   | 25g / 11 ms          |
| mechanical service life (switching cycles)  |                      |
| • of the main contacts typical  | 100 000              |
| • of auxiliary contacts typical   | 100 000              |
| electrical endurance (switching cycles) typical                                     | 100 000              |
| type of protection according to ATEX directive 2014/34/EU                           | Ex II (2) GD         |
| certificate of suitability according to ATEX directive 2014/34/EU                   | DMT 02 ATEX F 001    |
| reference code acc. to IEC 81346-2  | Q                    |
| Substance Prohibitance (Date)   | 01.10.2009           |
| <b>Ambient conditions</b>   |                      |
| installation altitude at height above sea level maximum                             | 2 000 m              |
| ambient temperature   |                      |
| • during operation  | -20 ... +60 °C       |
| • during storage  | -50 ... +80 °C       |
| • during transport  | -50 ... +80 °C       |
| temperature compensation  | -20 ... +60 °C       |
| relative humidity during operation  | 10 ... 95 %          |
| <b>Main circuit</b>   |                      |
| number of poles for main current circuit  | 3                    |
| adjustable current response value current of the                                    | 1.1 ... 1.6 A        |

|  |  |
|--|--|
| <b>current-dependent overload release</b>                            |  |
| <b>operating voltage</b>   |  |
| • rated value  | 690 V  |
| • rated value  | 20 ... 690 V   |
| • at AC-3 rated value maximum  | 690 V  |
| <b>operating frequency rated value</b>                               | 50 ... 60 Hz   |
| <b>operational current rated value</b>                               | 1.6 A  |
| operational current at AC-3 at 400 V rated value                     | 1.6 A  |
| operating power at AC-3  |  |
| • at 230 V rated value   | 0.3 kW   |
| • at 400 V rated value   | 0.6 kW   |
| • at 500 V rated value   | 0.8 kW   |
| • at 690 V rated value   | 1.1 kW   |
| operating frequency at AC-3 maximum                                  | 15 1/h   |
| <b>Auxiliary circuit</b>   |  |
| <b>number of NC contacts for auxiliary contacts</b>                  | 0  |
| <b>number of NO contacts for auxiliary contacts</b>                  | 0  |
| number of CO contacts for auxiliary contacts                         | 0  |
| <b>Protective and monitoring functions</b>                           |  |
| <b>product function</b>  |  |
| • ground fault detection   | No   |
| • phase failure detection  | Yes  |
| <b>trip class</b>  | CLASS 10   |
| <b>design of the overload release</b>                                | thermal  |
| <b>breaking capacity operating short-circuit current (Ics) at AC</b> |  |
| • at 240 V rated value   | 100 kA   |
| • at 400 V rated value   | 100 kA   |
| • at 500 V rated value   | 100 kA   |
| • at 690 V rated value   | 100 kA   |
| <b>breaking capacity maximum short-circuit current (Icu)</b>         |  |
| • at AC at 240 V rated value   | 100 kA   |
| • at AC at 400 V rated value   | 100 kA   |
| • at AC at 500 V rated value   | 100 kA   |
| • at AC at 690 V rated value   | 100 kA   |
| response value current of instantaneous short-circuit trip unit      | 21 A   |
| <b>UL/CSA ratings</b>  |  |
| <b>full-load current (FLA) for 3-phase AC motor</b>                  |  |
| • at 480 V rated value   | 1.6 A  |
| • at 600 V rated value   | 1.6 A  |
| <b>yielded mechanical performance [hp]</b>                           |  |
| • for single-phase AC motor  |  |
| — at 230 V rated value   | 0.1 hp   |
| • for 3-phase AC motor   |  |
| — at 460/480 V rated value   | 1 hp   |
| — at 575/600 V rated value   | 0.8 hp   |
| <b>Short-circuit protection</b>                                      |  |
| <b>product function short circuit protection</b>                     | Yes  |
| <b>design of the short-circuit trip</b>                              | magnetic   |
| <b>Installation/ mounting/ dimensions</b>                            |  |
| <b>mounting position</b>   | any  |
| <b>fastening method</b>  | screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 |
| <b>height</b>  | 97 mm  |
| <b>width</b>   | 45 mm  |
| <b>depth</b>   | 97 mm  |
| <b>required spacing</b>  |  |
| • for grounded parts at 400 V  |  |
| — downwards  | 30 mm  |

|                               |       |
|-------------------------------|-------|
| — upwards                     | 30 mm |
| — at the side                 | 9 mm  |
| • for live parts at 400 V     |       |
| — downwards                   | 30 mm |
| — upwards                     | 30 mm |
| — at the side                 | 9 mm  |
| • for grounded parts at 500 V |       |
| — downwards                   | 30 mm |
| — upwards                     | 30 mm |
| — at the side                 | 9 mm  |
| • for live parts at 500 V     |       |
| — downwards                   | 30 mm |
| — upwards                     | 30 mm |
| — at the side                 | 9 mm  |
| • for grounded parts at 690 V |       |
| — downwards                   | 50 mm |
| — upwards                     | 50 mm |
| — backwards                   | 0 mm  |
| — at the side                 | 30 mm |
| — forwards                    | 0 mm  |
| • for live parts at 690 V     |       |
| — downwards                   | 50 mm |
| — upwards                     | 50 mm |
| — backwards                   | 0 mm  |
| — at the side                 | 30 mm |
| — forwards                    | 0 mm  |

#### Connections/ Terminals

|  |   |
|--|---|
| product component removable terminal for auxiliary and control circuit | No  |
| type of electrical connection  |   |
| • for main current circuit   | screw-type terminals  |
| arrangement of electrical connectors for main current circuit          | Top and bottom  |
| type of connectable conductor cross-sections                           |   |
| • for main contacts  |   |
| — solid or stranded  | 2x (1 ... 2.5 mm <sup>2</sup> ), 2x (2.5 ... 10 mm <sup>2</sup> )                       |
| — finely stranded with core end processing                             | 2x (1 ... 2.5 mm <sup>2</sup> ), 2x (2.5 ... 6 mm <sup>2</sup> ), 1x 10 mm <sup>2</sup> |
| • at AWG cables for main contacts                                      | 2x (16 ... 12), 2x (14 ... 8)   |
| tightening torque  |   |
| • for main contacts with screw-type terminals                          | 2 ... 2.5 N·m   |
| design of screwdriver shaft  | Diameter 5 to 6 mm  |
| size of the screwdriver tip  | Pozidriv 2  |
| design of the thread of the connection screw                           |   |
| • for main contacts  | M4  |

#### Safety related data

|  |  |
|--|--|
| B10 value  |  |
| • with high demand rate acc. to SN 31920                           | 5 000  |
| proportion of dangerous failures                                   |  |
| • with low demand rate acc. to SN 31920                            | 50 %   |
| • with high demand rate acc. to SN 31920                           | 50 %   |
| failure rate [FIT]   |  |
| • with low demand rate acc. to SN 31920                            | 50 FIT   |
| T1 value for proof test interval or service life acc. to IEC 61508 | 10 y   |
| protection class IP on the front acc. to IEC 60529                 | IP20   |
| touch protection on the front acc. to IEC 60529                    | finger-safe, for vertical contact from the front |
| display version for switching status                               | Handle   |

#### Certificates/ approvals

|                          |
|--------------------------|
| General Product Approval |
|--------------------------|

[Confirmation](#)[KC](#)

| For use in hazardous locations | Declaration of Conformity | Test Certificates |
|--------------------------------|---------------------------|-------------------|
|--------------------------------|---------------------------|-------------------|



IECEx



ATEX



EG-Konf.

[UK Declaration of Conformity](#)[Special Test Certificate](#)[Type Test Certificates/Test Report](#)

| Marine / Shipping |
|-------------------|
|-------------------|



ABS

BUREAU  
VERITAS

DNV



LRS



PRIS



RINA

| Marine / Shipping | other | Railway |
|-------------------|-------|---------|
|-------------------|-------|---------|



RMRS

[Confirmation](#)

VDE

[Vibration and Shock](#)[Confirmation](#)

| Further information |
|---------------------|
|---------------------|

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV2021-1AA10>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV2021-1AA10>

Service&amp;Support (Manuals, Certificates, Characteristics, FAQs,...)



<https://support.industry.siemens.com/cs/ww/en/ps/3RV2021-1AA10>


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RV2021-1AA10&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RV2021-1AA10&lang=en)Characteristic: Tripping characteristics, I<sup>t</sup>t, Let-through current<https://support.industry.siemens.com/cs/ww/en/ps/3RV2021-1AA10/char>

Further characteristics (e.g. electrical endurance, switching frequency)

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RV2021-1AA10&objecttype=14&gridview=view1>

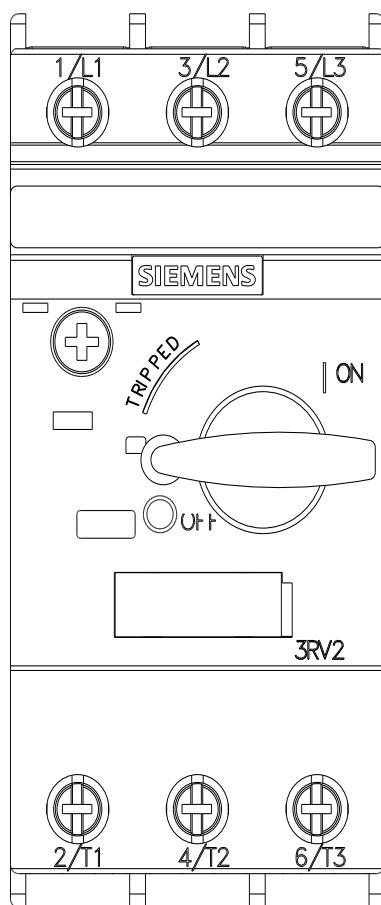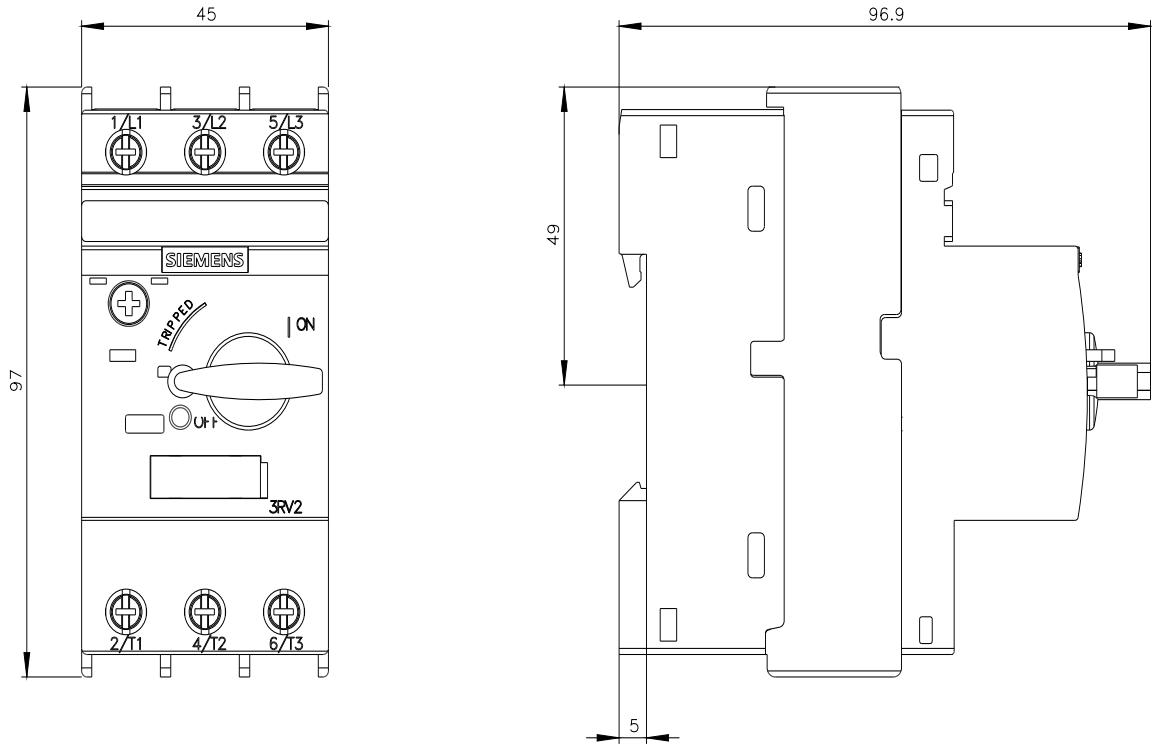

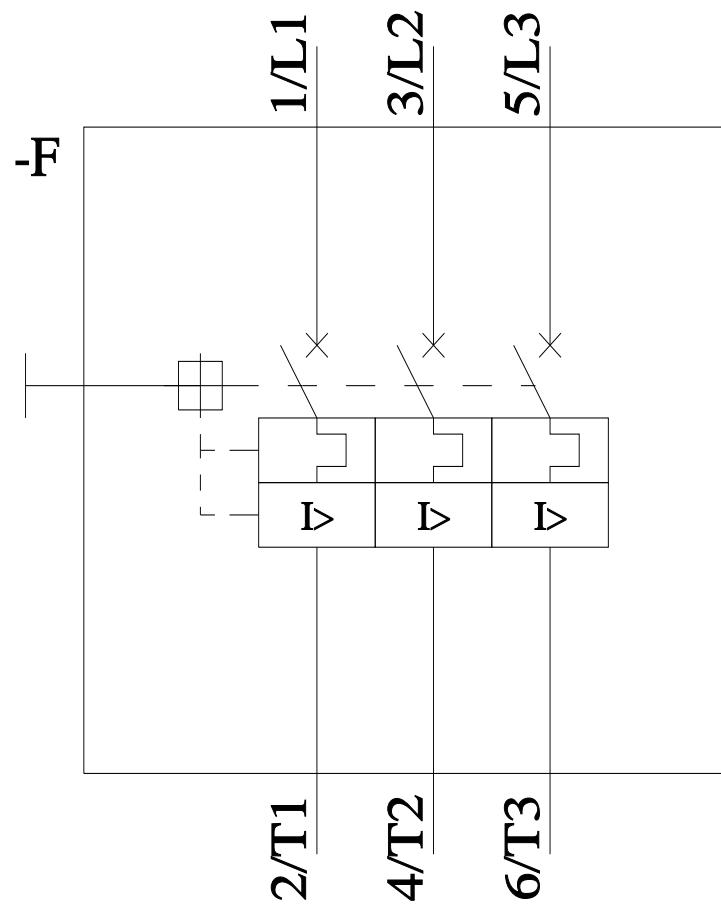

last modified:

11/30/2021 