



LV HRC fuse element, NH000, In: 100 A, gG, Un AC: 500 V, Un DC: 250 V, Front indicator, live grip lugs

Model	
product brand name	SETRON
product designation	LV HRC fuse link
design of the product	With blade contacts
design of an identification indicator	Front indicators
design of the switching contact	Non-corroding, silver-plated
design of the fuse link	LV HRC fuse link
General technical data	
size of fuse system / acc. to DIN EN 60269-1	NH000
operating class of the fuse link	gG
mounting type	non-insulated grip lugs
type of voltage / of the operating voltage	AC/DC
supply voltage	
• at AC / rated value	500 V
• at DC	250 V
Protection class	
protection class IP	IP20, with connected conductors
Switching capacity	
switching capacity current	
• at DC / acc. to IEC 60947-2 / rated value	25 kA
• acc. to IEC 60947-2 / rated value	120 kA
Dissipation	
power loss [W]	6.95 W
power loss [W] / for rated value of the current / at AC / in hot operating state / per pole	6.95 W
Current	
operational current	
• at 30 °C / rated value	98 A
• at 40 °C / rated value	95 A
• at 45 °C / rated value	92 A
• at 50 °C / rated value	90 A
• at 55 °C / rated value	88 A
• at 60 °C / rated value	86 A
• at AC / rated value	100 A
Mechanical Design	
width / of the enclosure	21 mm
mounting position	Any, preferably vertical
net weight	130 g
Environmental conditions	

ambient temperature / during operation	-5 °C 40 °C
environmental category	-20 to +50 at 95% relative humidity
environmental category / during storage	90% at 20°C

General Product Approval	Declaration of Conformity	Test Certificates
---------------------------------	----------------------------------	--------------------------



[Special Test Certificate](#)

[Type Test Certificates/Test Report](#)

Test Certificates	Marine / Shipping	other
--------------------------	--------------------------	--------------

[Miscellaneous](#)



[Environmental Confirmations](#)

[Miscellaneous](#)

[Miscellaneous](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3NA3830>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3NA3830>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)



http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NA3830

CAX-Online-Generator


<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

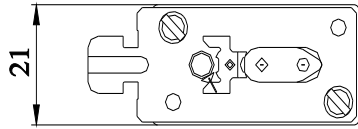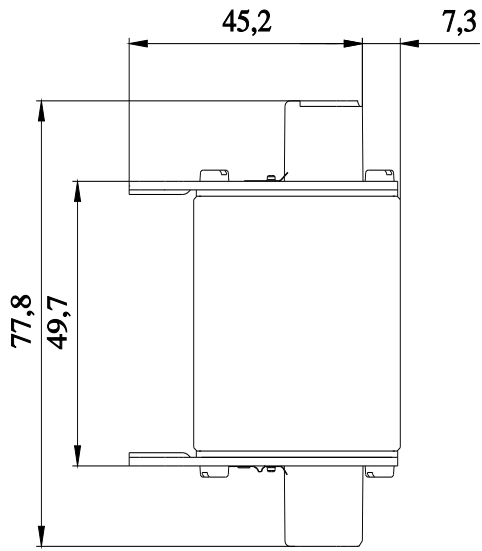

F

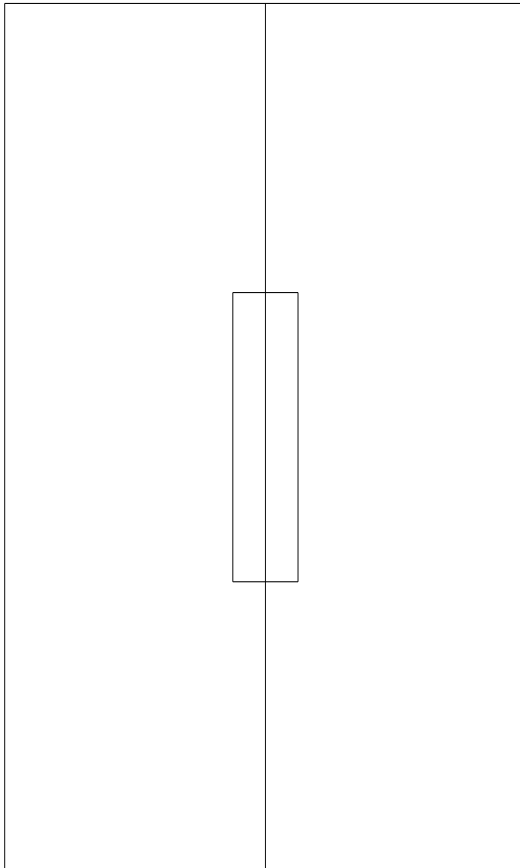

FU

