



SIMATIC ET 200SP communication module CM AS-Interface Master ST according to AS-i specification V3.0

General technical data		
product designation		AS-Interface Master
product type designation		CM AS-i Master ST
protection class IP		IP20
type of electrical connection of the AS-Interface		ET 200SP BaseUnit (Type C0), 20 mm
type of voltage supply		Via AS-i and backplane bus
operating condition separate power supply 24 V		No
consumed current		
<ul style="list-style-type: none"> from profile conductors of the AS-Interface <ul style="list-style-type: none"> — at 30 V maximum — at 24 V with AS-i Power24V maximum from backplane bus maximum 	 mA mA mA	 70 70 20
power loss [W]	W	1.7
insulation voltage rated value	V	500
product function suitable for AS-i Power24V		Yes
<ul style="list-style-type: none"> note 		All product versions
product feature redundancy capability		No
product function		
<ul style="list-style-type: none"> web-based management diagnostics via email galvanic isolation 		 No No Yes
display version		
<ul style="list-style-type: none"> as status display by LED 		DIAG, AS-i OK, AS-i FAULT, PF, CER, CM, AUP, PWR, SL_Xy (A), SL_xY (B)
type of configuration of the AS-Interface		Set pushbutton on device, STEP7, GSD, command interface
Communication/ Protocol		
version of the AS-Interface specification		V 3.0
AS-Interface master profile is supported		M4 (in acc. with AS-interface specification V 3.0)
type of data transmission		ET 200SP backplane bus
number of interfaces		
<ul style="list-style-type: none"> as AS-Interface acc. to RS 485 acc. to Industrial Ethernet acc. to PROFINET acc. to wireless acc. to USB other 	 1 0 0 0 0 0 0	 1 0 0 0 0 0 0
product component optical interface		No
protocol is supported		

• ASIsafe (Safety at work) protocol		No
• PROFIsafe protocol		No
• PROFIBUS protocol		No
• PROFINET IO protocol		No
• PROFINET CBA protocol		No
• TCP/IP		No
• SNMP		No
standard for wireless communication IEEE 802.11		No

Inputs/ Outputs		
number of inputs for AS-Interface maximum		496
number of outputs for AS-Interface maximum		496
number of AS-i slaves per AS-Interface maximum		62
bus cycle time of the AS-Interface		
• for 31 slaves	ms	5
• for 62 slaves	ms	10
access to digital I/O data		via process image/peripheral addresses
access to analog I/O data		via process diagram/peripheral addresses and data record transfer

Mechanical data		
width	mm	20
height	mm	69.2
depth	mm	53.6
fastening method		pluggable in BaseUnit
module format		IP20

Ambient conditions		
ambient temperature		
• if installed on horizontal mounting rail	°C	0 ... 60
• if installed on vertical mounting rail during operation	°C	0 ... 50
• during transport	°C	-40 ... +70
• during storage	°C	-40 ... +70
relative humidity at 25 °C during operation maximum	%	95
installation altitude at height above sea level maximum	m	2 000

Safety related data		
suitability for use safety-related function		No
explosion protection marking for intrinsic safety of related equipment		
• EEx ia		No
• EEx ib		No
explosion protection category for gas		none
explosion protection category for dust		none

Certificates/ approvals		
General Product Approval	EMC	For use in hazardous locations

[EM](#)



Declaration of Conformity	Marine / Shipping	other
---------------------------	-------------------	-------



[NK / Nippon Kaiji Kyokai](#)



[Confirmation](#)

Further information
Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RK7137-6SA00-0BC1>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK7137-6SA00-0BC1>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RK7137-6SA00-0BC1>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RK7137-6SA00-0BC1&lang=en

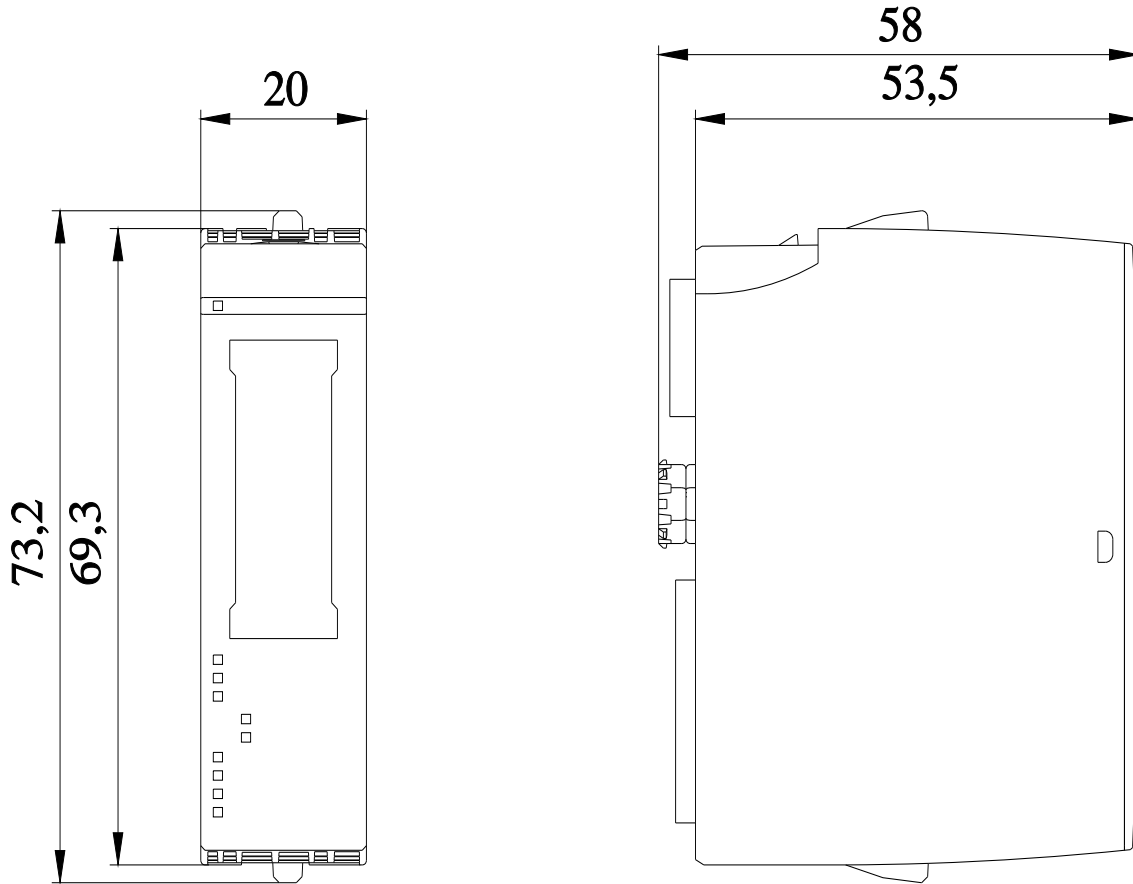

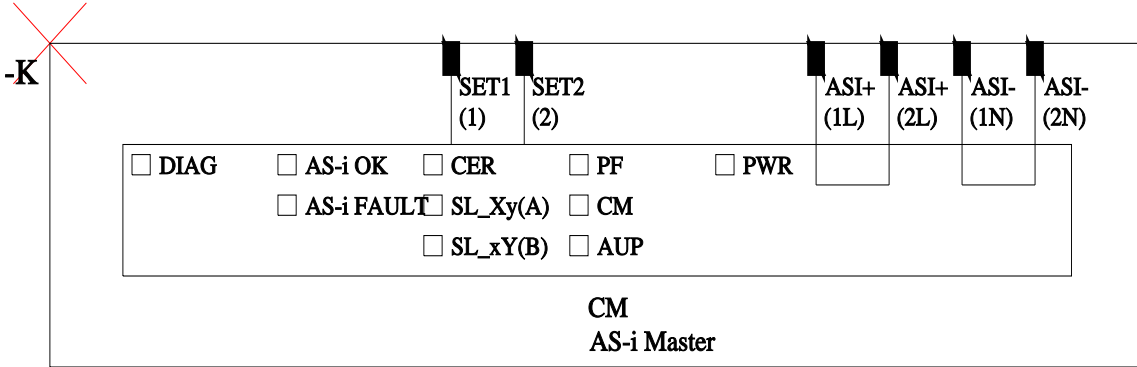

last modified:

1/18/2021